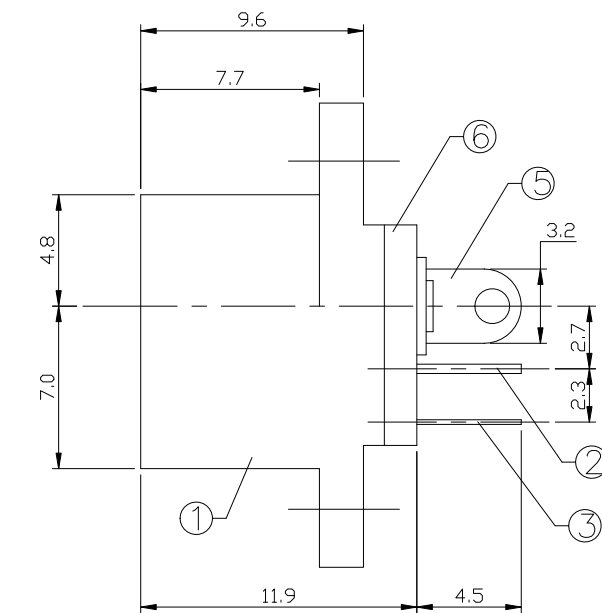



1. Rating : **DC 30V 0.5A** ;
2. Contact resistance: **$\leq 0.03\Omega$** ;
3. Insulation resistance: **$\geq 100M\Omega$** (DC250V);
4. Withstand voltage: **500VAC** ;
5. Insertion and extraction force: **3-20N**;
6. life test: **5,000 cycles** 。

6	COVER	1	PA66/PBT	
5	CONTACT	1	BRASS	Cu-Sn-Plating
4	POD	1	H59 BRASS	Ni-Plating
3	SPRING	1	65Mn STEEL	Cu-Sn-Plating
2	FLAT PIECE	1	H62 BRASS	Cu-Sn-Plating
1	HOUSING	1	PA66/PBTT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM	TYPE:	MODEL NO:	PAPER NO:	PAGE 1 OF 1
	DC JACK	DC-016	TOLERANCE ANGLES	SCALE VER
			±0.15	±1.5° 3:1 1
DESIGNER		东莞轻平电子科技有限公司		
BY CHECK				
By APPROVED				