
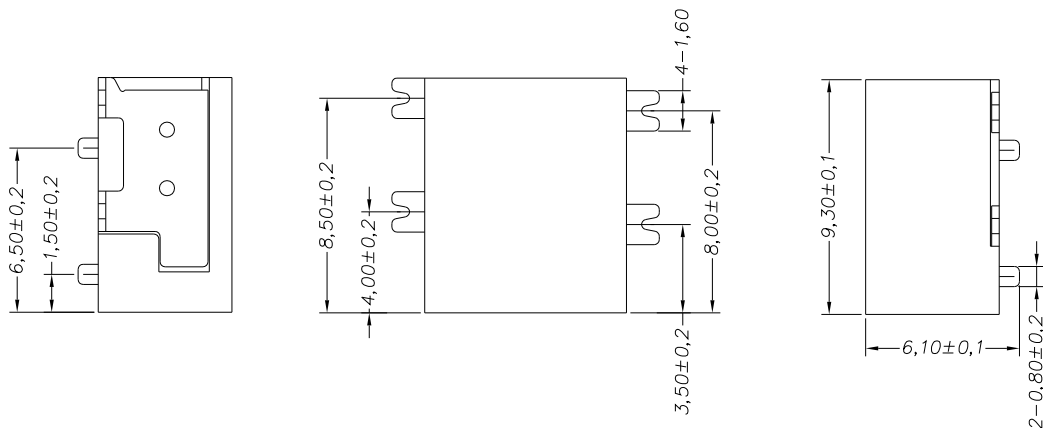


主要技术性能	公 差
额定电负荷	DC 30V/0.5A
接触电阻	$\leq 0.03\Omega$
绝缘电阻	$\geq 100M\Omega$
耐 压	AC500V (50Hz)/min
插 拔 力	3~20N
使用温度范围	-30~70℃
使用寿命	5000次



Technical drawing of a mechanical assembly with dimensions. The drawing shows a central vertical axis with two circular features (holes) spaced 1,50 units apart. To the left, two rectangular blocks labeled '3' are stacked vertically, with a total height of 8,50 units and a spacing of 4,00 units between them. To the right, two rectangular blocks labeled '4' and '5' are stacked vertically, with a total height of 8,00 units and a spacing of 3,50 units between them. The horizontal distance between the centerlines of the two blocks on the left is 7,00 units. The horizontal distance between the centerline of the left blocks and the centerline of the right blocks is 11,60 units. The vertical distance from the bottom reference line to the centerline of the right blocks is 6,50 units. The vertical distance from the centerline of the right blocks to the top of the right blocks is 2,00 units.

PIN	Ø 1.0	Ø 1.3	Ø 1.65
APPO			

E	7								设计	方 成	部 门 会 签			产品名称:		
	6									版次	A 2	装配部		冲压部		DC 电源插座
	5	DC-033	弹 片	1	H62磷铜带	T=0.30			锡锡	日期	2017.09.20	注塑部		市场部		产品型号:
	4	DC-033	插 片	1	H62黄铜带	T=0.30			铜锡	审核						DC-033
	3	DC-033	平 片	1	H62黄铜带	T=0.30			铜锡	核准		共 6 张		第 4 张		
	2	DC-033	中心针	1	H62黄铜棒				铜锡	东莞市轻平电子科技有限公司 DONGGUAN QINGPING ELECTRONIC TECHNOLOGY CO., LTD.						图片编号:
1	DC-033	基 座	1	PPA	黑色		QP-DC-033-01207-2017									
序号	产品编号	产品名称	数量	材 料	规格	电镀										
	1		2		3		4		5		6		7			