
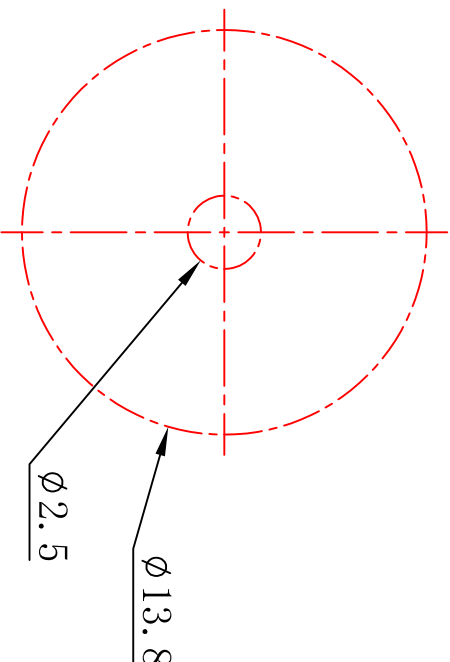

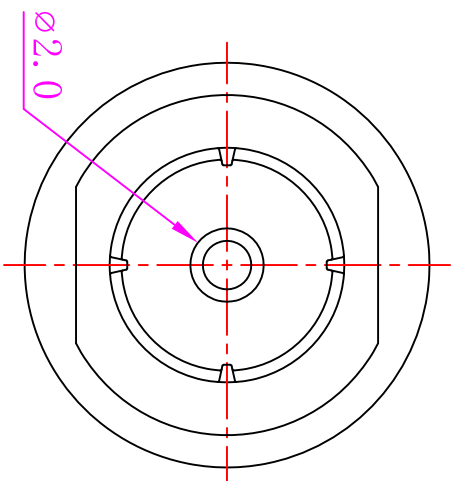
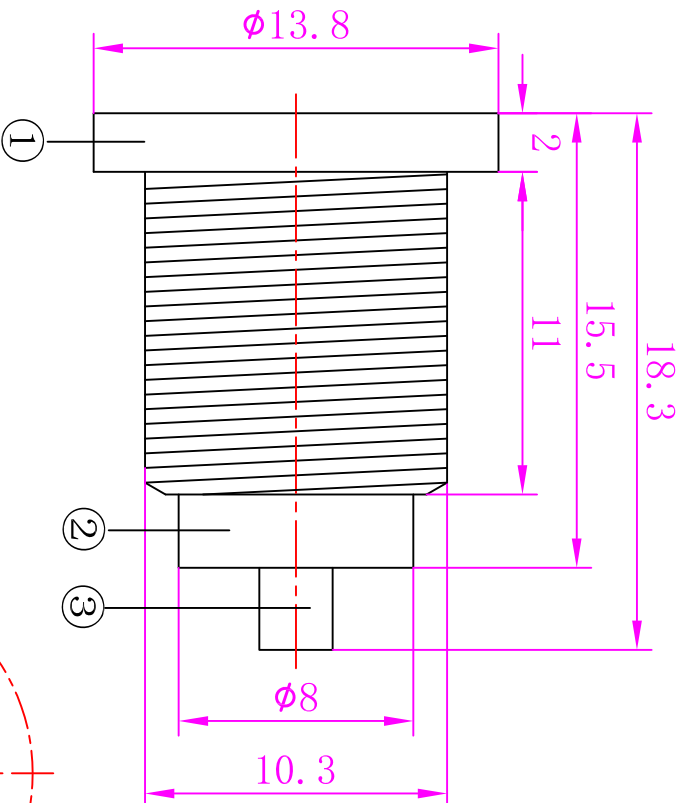


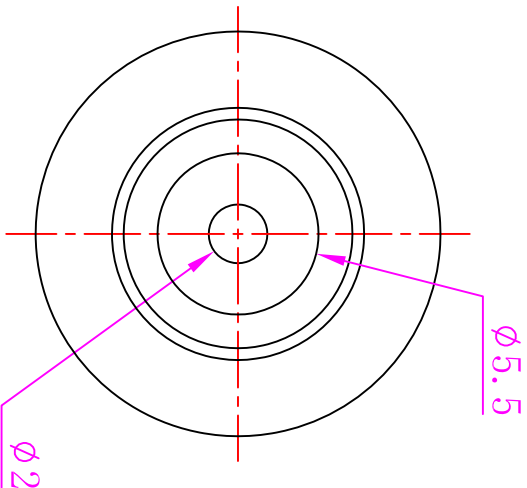

P.C.B LAYOUT
TOP VIEW

主要技术性能				公 差				部 门 会 签			
额定电负荷				X. ±0.20				装 配 部			
接触电阻				.X ±0.10				注 塑 部			
绝缘电阻				.XX ±0.05				冲 压 部			
耐 压				.XXX ±0.02				视 角			
插 拔 力				X' ±5°				重 量			
使用温度范围				.X' ±2°				比 例			
使用寿命				.XX' ±1°				共 1 张			
5000次				核 准				第 1 张			
DC 30V/0.5A				A 1				DC-022D-2.0			
≤0.03Ω				.X ±0.10				电源插座			
≥100MΩ				.XX ±0.05				东莞市轻平电子科技有限公司			
AC500V(50Hz)/min				.XXX ±0.02							
3-20N				X' ±5°							
-30~70℃				.X' ±2°							
5000次				.XX' ±1°							
核 准				共 1 张							
第 1 张											