

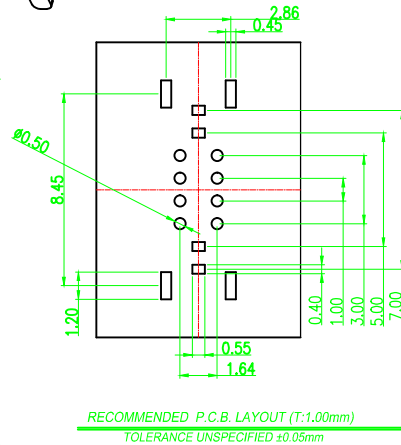
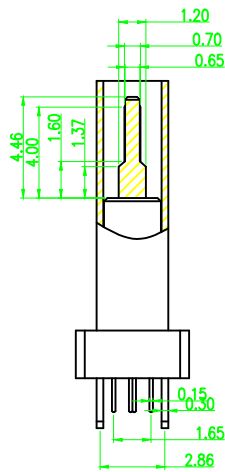
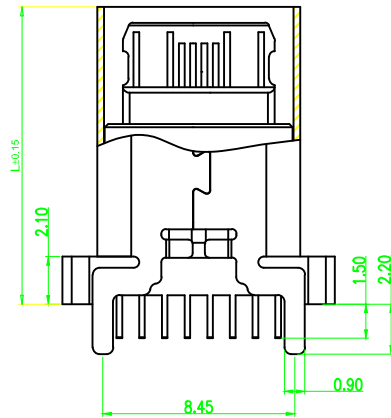



RoHS Compliant

版次	工程变更单号	基本描述	日期	修订

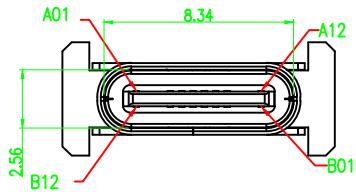

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm



SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. CONTACT RESISTANCE: 30m MAΩ

1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.

1-3. INSULATION RESISTANCE: 100M MIN. MEASURED BY 500 VDC

2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE :0.5-2.0kgf(REF.)

2-2. WITHDRAWAL FORCE :0.8-2.0kgf(REF.)

3. LIFE TEST: 10,000 CYCLES.

4. TO CONFORM TO THE KRCONN HAZARDOUS SUBSTANCE FREE SPEC.

L= MM

8.80	9.30	10.00	10.50	12.40	13.10	13.70	15.00	17.50
------	------	-------	-------	-------	-------	-------	-------	-------

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



东莞市轻平电子科技有限公司
DONGGUAN QINGPING ELECTRONIC TECHNOLOGY CO., LTD.

品名规格	USB TYPE C 12P立式插件 四脚插板 全规格高度				设计	LLB
未注公差:	产品料号	QP-C12P-WS4			审核	WLC
.000 ±0.10	图纸类型	成品图	比例	1:1	核准	TXJ
.00 ±0.20	视角		版本	A/0		
.0 ±0.30	角度	±1°	单位	MM		