

由 Autodesk 教育版产品制作

A

B

D

E

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作





A

B

D

E

由 Autodesk 教育版产品制作

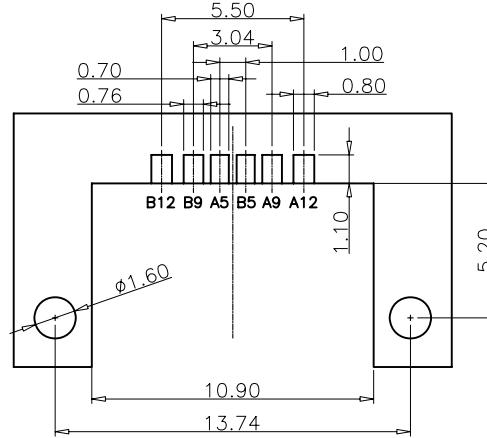
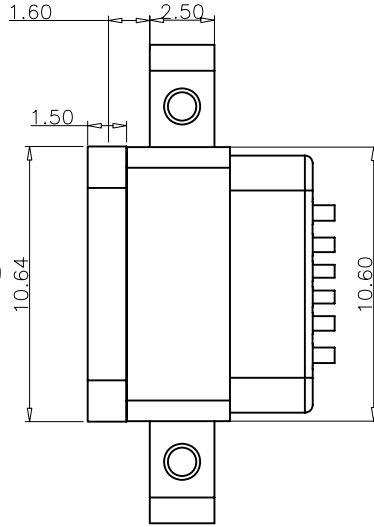
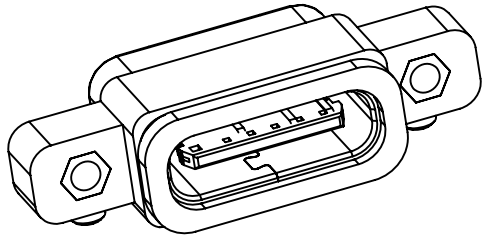



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

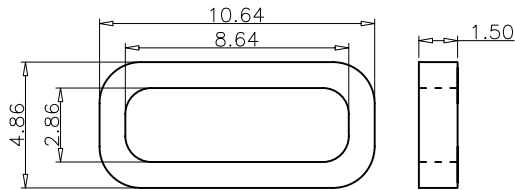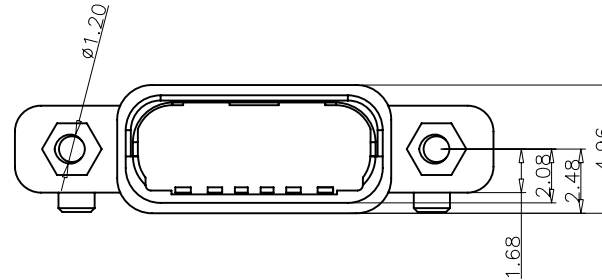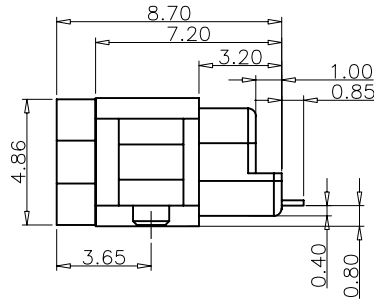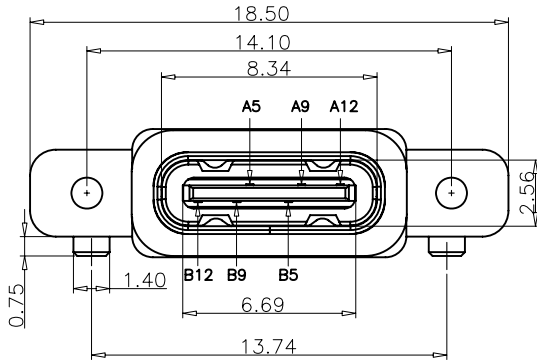

建议的胶圈尺寸

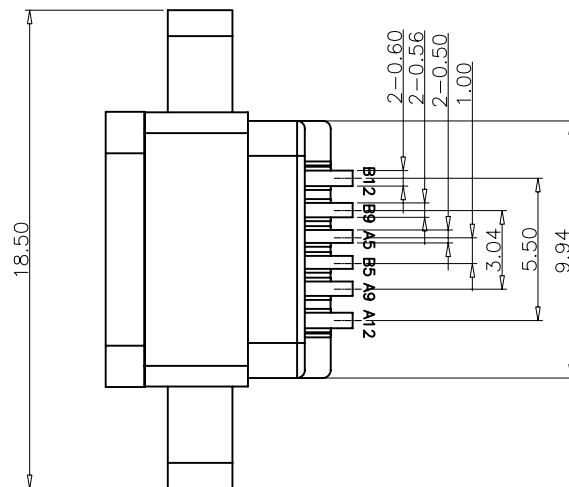

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	SHELL	STAINLESS STEEL	NI Plated	1PCS		
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS		
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET		
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS		
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS		
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY		
TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	东莞市轻平电子科技有限公司			
X.X ±0.30	X.* ± 2°	PART NO.			TITLE: TYPE-C 6PIN带双耳螺丝孔防水母座	
.XX ±0.20	.X* ± 1°					
.XXX ±0.10	.XX* ±0.5°					
UNITS	mm	APPD: DMX	DRAWG NO. AAO-078			
MATERILA		CHED: TANG				
FINISH		DRAW: SHI		SCALE 1:1	SHEET 1/1	REV. A