

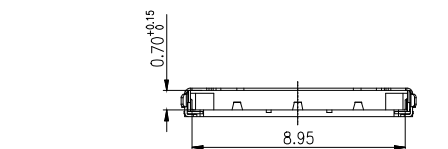


[illegible]

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. CURRENT RATING: 1A .
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE:500V R.M.S MIN;
 - 1-3. INSULATION RESISTANCE: 500MΩ MIN.
 - 1-4. CONTACT RESISTANCE:100mΩ MAX.(INITIAL)
2. LIFE TEST: 1500 CYCLES .
3. OTHER GENERAL SPEC. TO REFER " NANO SIM SPEC".
4. TO CONFORM HAZARDOUS SUBSTANCE FREE SPEC.
5. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: ⊙
6. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING.
7. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
8. PACKAGING: TAPE & REEL.
9. ⊗ REPRESENT CRITICAL DIMENSIONS.
10. ▽ REPRESENT CPK DIMENSIONS.

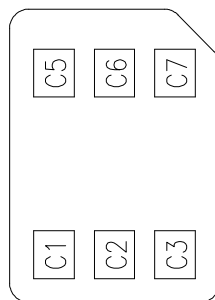

NANO SIM CARD PAD

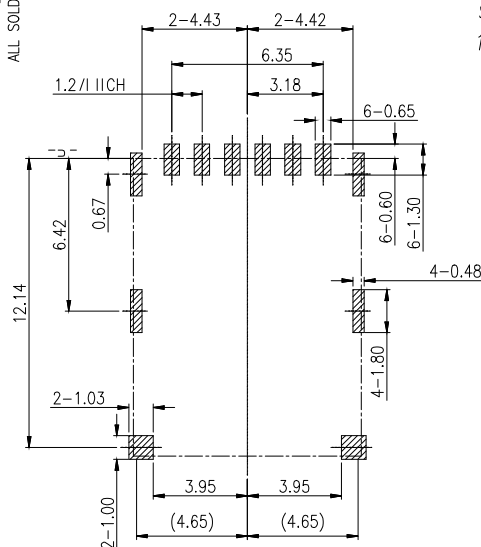

RECOMMENDED P.C.B. LAYOUT
TOLERANCE (TOP VIEW) $\pm 0.05\text{mm}$

C	SHELL	1	STAINLESS STEEL,0.10T	GOLD FLASH ON SOLDER AREA 50u" MIN NICKEL UNDER-PLATED
B	CONTACT	1	COPPER ALLOY,0.10T	GOLD FLASH ON CONTACT AREA AND SOLDER AREA 50u" MIN NICKEL UNDER-PLATED
A	HOUSING	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR


东莞市轻平电子科技有限公司
 DONGGUAN QINGPING ELECTRONIC TECHNOLOGY CO., LTD

公差公差		角度公差		品名		NANO SIM HI.20				
GENERAL TOLERANCE		ANGLE TOLERANCE		TITLE						
DIMENSIONS IN: mm UNLESS OTHERWISE SPECIFIABLE				UNIT mm		材料 MATERIAL		零件号 DIE NO.		QP-NS120-T116
DIMENSION TOLERANCE				比例 SCALE 1:1		视图 DRAWING		厂牌号 PRO NO.		QP-120-1161--
X.X ± 0.20 X.XX ± 0.10 X.XXX ± 0.05 ANGULAR: ± 2°				图幅 SIZE A4		审查 CHECKED				
制图 PROV.						核准 APPROVE		页数 SHEET		1/1
								版本 REV.		

4							
3							
2							
1							
种 SID	名 NAME	数量 QTY	日期 DATE	材 MATERIAL	颜色 Plating coating	颜色 colour	备注 REMARKS