
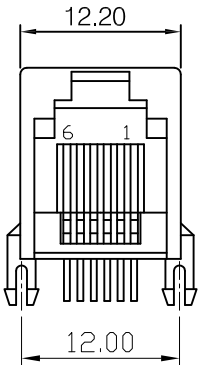


REV.	ECN NO.	DESCRIPTION	REVISED	DATE

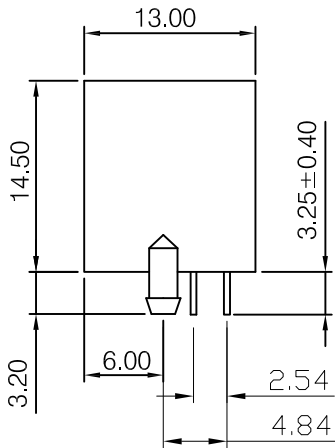


MATERIAL:



- 1. HOUSING MATERIAL: PBT,PA66,PA46(UL 94V-0)
- 2. CONTACT MATERIAL: ROUND PINS-0.46mm DIAMETER
PHOSPHOR BRONZE;
GOLD PLATING OVER NICKEL

ELECTRICAL

- 1. VOLTAGE RATING : 125 VAC RMS
- 2. CURRENT RATING: 1.5 AMP
- 3. CONTACT RESISTANCE: 40 MILLIOHMS MAX
- 4. INSULATION RESISTANCE: 500 MEGOHMS MIN @500V DC
- 5. DIELECTRIC WITHSTANDING
RISISTANCE: 1000V AC RMS 60Hz. 1MIN
- 6. DURABILITY: 750 CYCLES MIN
- 7. TEMPERATURE: -40°C/+85°C

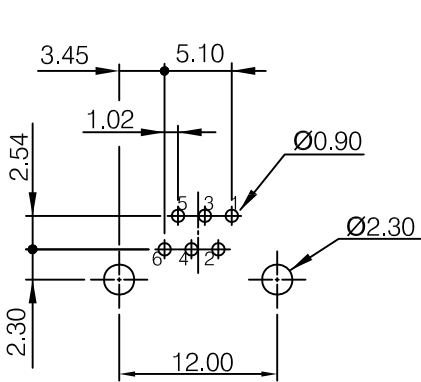

PCB LAYOUT
(Top View)

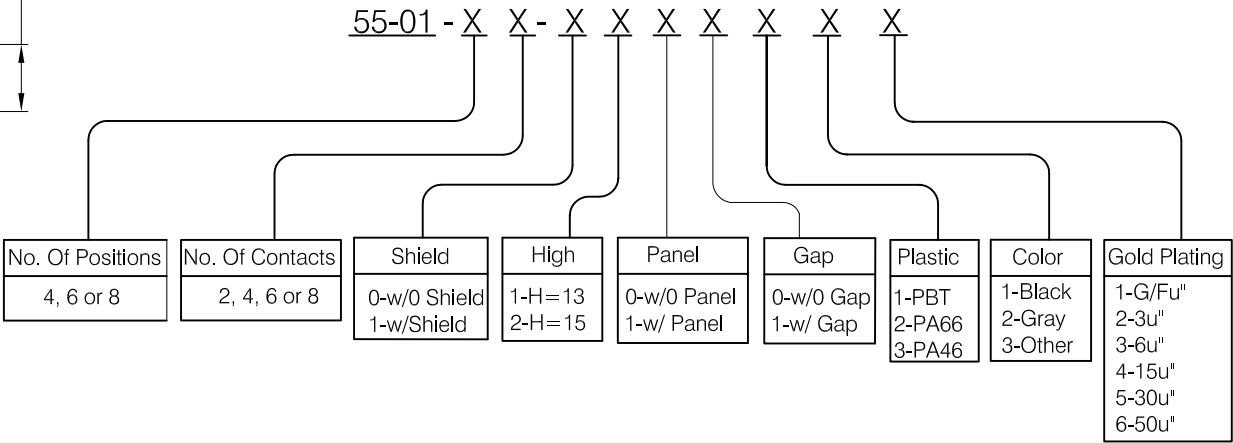

		NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE		DR. Nina	DATE MAY-06-12	东莞市轻平电子科技有限公司
RJ11 OR RJ12 ENTRY PCB JACK	REV: A1	THIRD ANGLE PROJECTION 	MM	ANGLE	CK'D Jack	MAY-06-12	
DWG. NO. 012052027	SHEET: 1 OF 1	DIMENSION IN mm	.0±0.30 .00±0.20 .000±0.13	.0±2° .0±1°	APP'D Jack	MAY-06-12	