


RoHS Compliant

SYMBOL	REVISION	APPROVAL	DATE

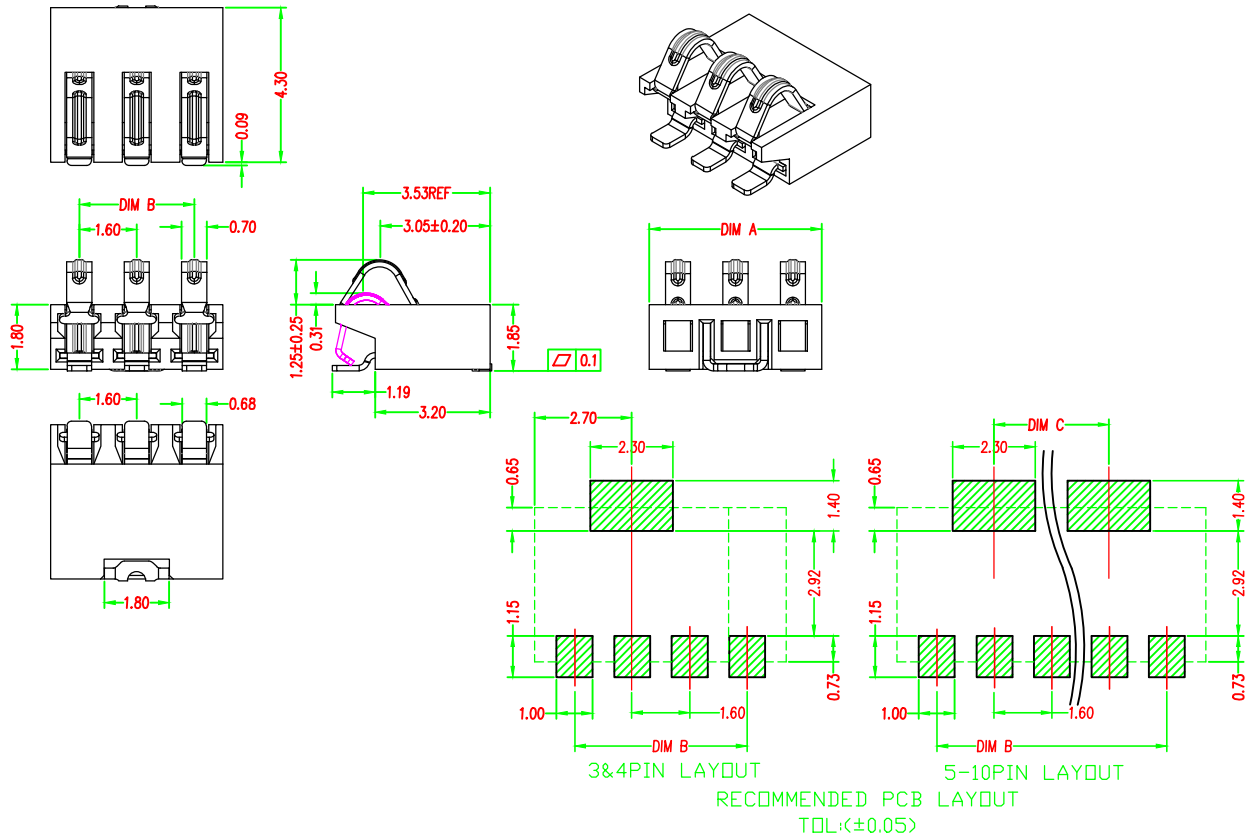

- NOTES-
- 1.Electrical:
Contact resistance:50m ohms max.
Dielectric withstanding voltage:250V RMS.
Insulation resistance:1000M ohms min.
 - 2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE:2.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:3000cycles MIN.
 - 3.Environment:
Operating Temperature:-55°to+105°.
 - 4.FINISH:
TERMINAL: GOLD Plated ALL Over NICKEL.
 - 5.MATERIAL:
5.1.Housing: HI- TEMP Plastic,UL94V-0,black;
5.2.Terminal: Coppel alloy,T=0.15mm
5.3 Stator:Brass T=0.20mm

QP-10P-1.6-1812	16.00	14.40	11.20
QP-9P-1.6-1812	14.40	12.80	9.60
QP-8P-1.6-1812	12.80	11.20	8.00
QP-7P-1.6-1812	11.20	9.60	6.40
QP-6P-1.6-1812	9.60	8.00	4.80
QP-5P-1.6-1812	8.00	6.40	3.20
QP-4P-1.6-1812	6.40	4.80	0
QP-3P-1.6-1812	4.80	3.20	0
BE FILED	DIMA	DIMB	DIMC

No.	DESCRIPTION	MATERIAL	PLATING
1	CONTACT TERMINAL	PHOSPHOR COPPER	Au PLATED
2	HOUSING	LCP	BLACK



东莞市轻平电子科技有限公司
DONGGUAN QINGPING ELECTRONIC TECHNOLOGY CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	C.N.Li	DWG.No.	CL0083
PART NO.		SEE "LABEL"			CHECK	G.G.Feng	REV.	A0
	UNIT	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ± 0.3	ANGLE	APPROVAL	z.y.Cai	DATE	2023-4-15
	mm		X.XX ± 0.2 X.XXX ± 0.1		0°±3°	SCALE	1:1	PAGE